


02. Search data model

(i)

-
-
-
- Tip(Summary) (A() B()

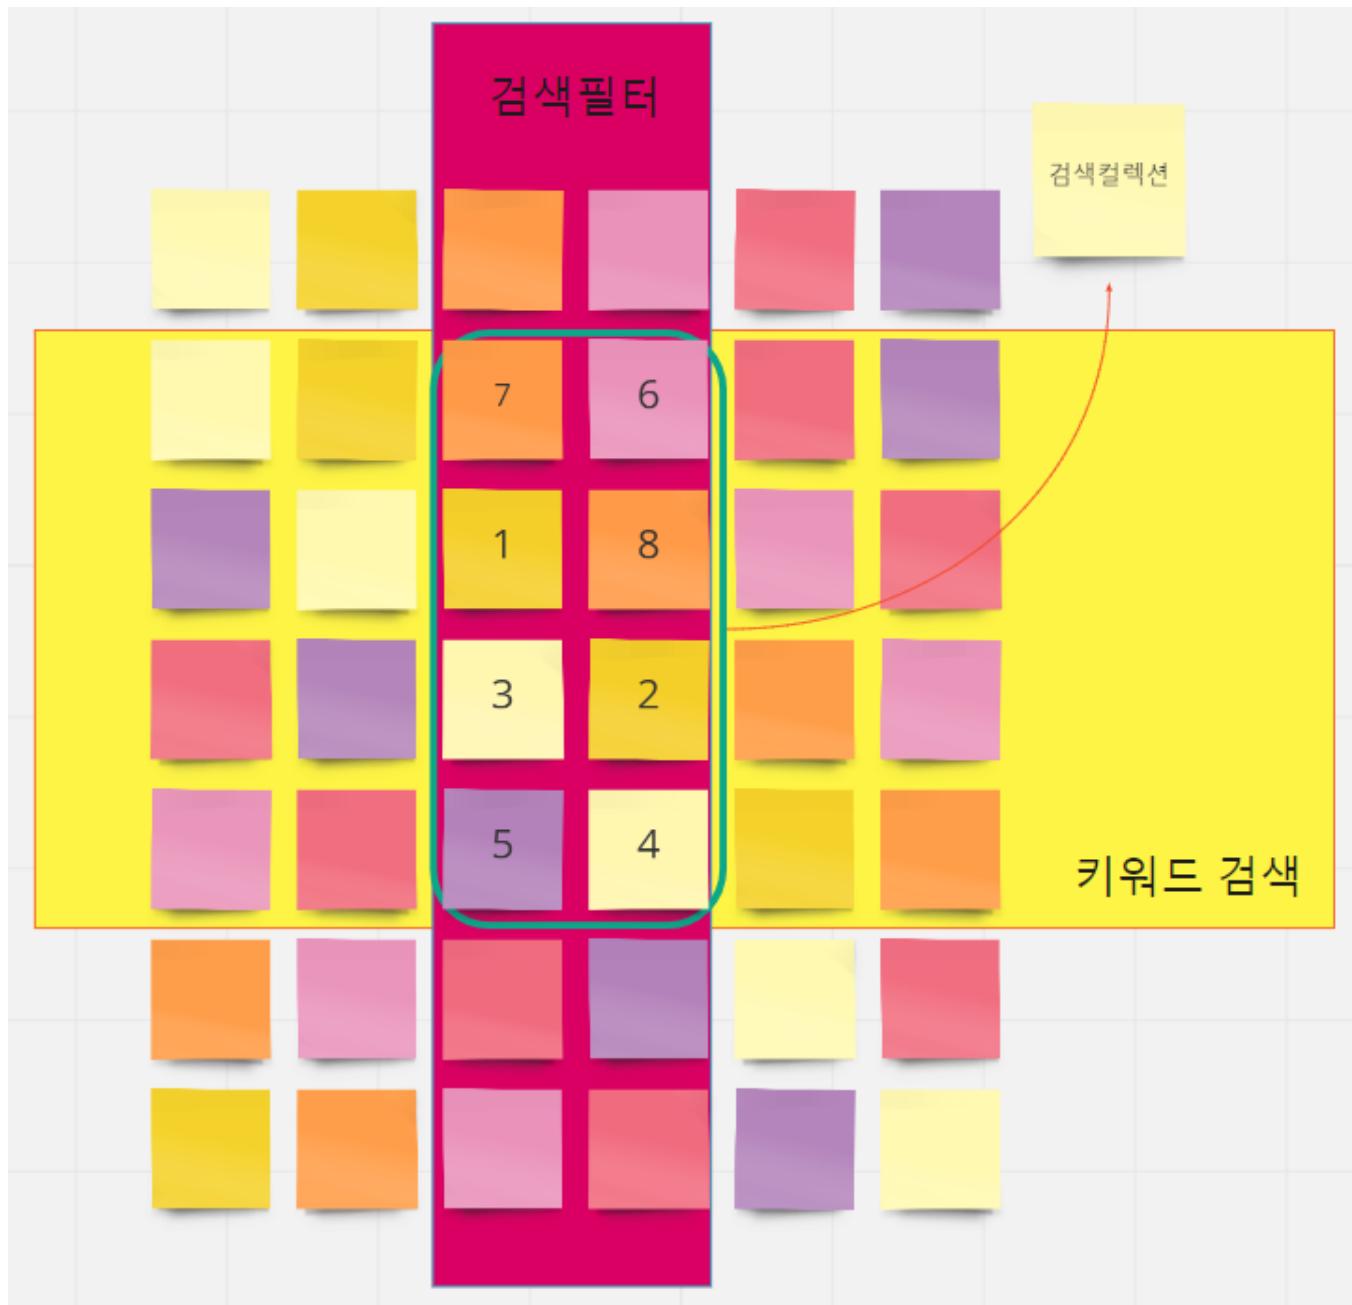

()

```
namespace SearchApi.Models.Filter
{
    public class Paging
    {
        public int page { get; set; } // 0 base
        public int limit { get; set; }
    }

    public class Sort
    {
        public string price { get; set; }

        public string viewCnt { get; set; }

        public string saleCnt { get; set; }
    }

    public class Filters
    {
        public int minPrice { get; set; }

        public int maxPrice { get; set; }

        public string category1 { get; set; }

        public string category2 { get; set; }

        public string category3 { get; set; }

        public string tag { get; set; }
    }

    public class SearchFilter
    {
        public Paging paging { get; set; }

        public Sort sort { get; set; }

        public Filters filters { get; set; }

        public string keyword { get; set; }
    }
}
```

```
0 . .
• :
• :
• : ...
```

```
public class FilterCount
{
    public string fieldName { get; set; }

    public string name { get; set; }

    public int count { get; set; }
}

public class Summary
{
    public List<string> tags { get; set; }

    public List<FilterCount> filterCounts { get; set; }

}

public class SearchResult
{
    public List<SearchGoods> list {get;set; }

    public int total { get; set; }

    public int size { get; set; }

    public Summary summary { get; set; }
}
```

(SearchGoods)
.
. .
1. .
2. A -15 , B -20 .
3. +A () .